



- Sprinkler Emergency Cabinets
- Sprinkler Escutcheons
- Fusible Links

Sprinkler Emergency Cabinets

• Model A4

Designed to carry an emergency supply of sprinklers and a sprinkler wrench. Made of light weight steel with holes for mounting. These compact cabinets are finished in attractive red enamel and are furnished with knockouts to accommodate either $\frac{1}{2}$ or $\frac{3}{4}$ sprinkler threads. The Model A4 Cabinets are available in the following sizes:

- 3 Capacity - For residential sprinklers in NFPA 13D and 13R systems.
5 high x $7\frac{3}{16}$ long x $2\frac{3}{8}$ deep.
Locate wrench separately.
- 6 Capacity Standard - For $\frac{1}{2}$ and $\frac{3}{4}$ NPT standard and large orifice sprinklers.
5 high x 14 long x $2\frac{3}{8}$ deep.
- 6 Capacity Large - For ESFR, XLO and VELO Sprinklers.
 $6\frac{1}{4}$ high x 14 long x $3\frac{1}{8}$ deep.
- 12 Capacity Standard - For $\frac{1}{2}$ and $\frac{3}{4}$ NPT standard and large orifice sprinklers.
5 high x 14 long x 4 deep.

• Model A3

Model A3 Cabinets are designed to carry an emergency supply of decorative type sprinklers and an installation wrench. They are able to accommodate 12 Reliable Models G Recessed, G1, G4, G4FR, ZX or Model B Flush Sprinklers, and up to 6 sprinklers with a 1 adjustable inlet.

Installation Data:

Size of Cabinet: $16\frac{13}{16}$ long x $14\frac{1}{4}$ high x $3\frac{13}{16}$ deep.

Size of Mounting Holes: $\frac{1}{4}$ diameter.


Spacing of Mounting Holes: $13\frac{1}{2}$ length - 11 height.

Ordering Information


When ordering, specify Model (A4 or A3) and cabinet capacity size and type (Standard or Large). Sprinklers and sprinkler wrenches are to be ordered separately.

Sprinkler Escutcheons


These escutcheons enhance the appearance of installations by covering exposed fittings of automatic sprinkler systems that are visible beyond finished ceilings and walls. Furnished to accommodate NPT male pipe threads, escutcheons are held firmly in place by the sprinklers. The finishes provided are decorative and intended for indoor use.

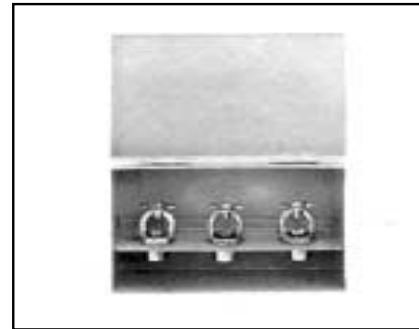

Model A4
3 Capacity Residential

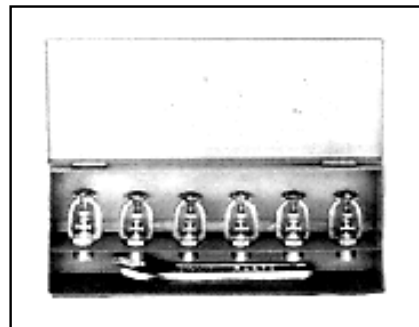

Model A4
6 Capacity Standard

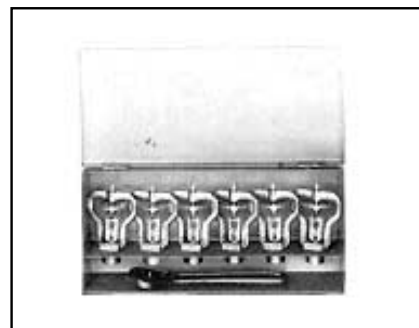

Model A4
6 Capacity Large



Model A4
12 Capacity Standard

Approvals

There are no UL Listings or FM Approvals associated with the Models A, B, and C one piece escutcheons or the Model HB two piece escutcheon. They may be used with any Reliable Sprinkler with the exception of recessed sprinklers which are listed together with their respective escutcheons. Refer to the appropriate technical bulletins for this information.

• Model A - One Piece

Two outer lips grip the escutcheon tightly to the sprinkler. Available in steel with chrome bright and bronze tone plated finishes.

Diameter: 3 ; Depth including lips: $\frac{13}{16}$; $\frac{1}{2}$ NPT.



• Model B - One Piece

Available in steel with satin chrome, bright chrome and brass plated and white painted finishes. Inner fingers grip tightly to the sprinkler. Also available for 10mm sprinklers.

Diameter: $2\frac{7}{8}$; Depth: $\frac{1}{16}$; $\frac{1}{2}$ NPT.



• Model C - One Piece

Available in steel with satin chrome, bright chrome and brass plated and white painted finishes. Inner fingers grip tightly to the sprinkler. Also available for 10mm sprinklers

Diameter: $2\frac{7}{8}$; Depth: $\frac{1}{8}$; $\frac{1}{2}$ NPT.



• Model HB - Two Piece

Telescoping design permits up to 1 adjustment to compensate for variations in the distance that pipe couplings extend below ceilings. Made of steel and available in brass, chrome, satin nickel and off-white finishes.

Diameter: $3\frac{1}{2}$; Depth: 2 Min, 3 Max; $\frac{1}{2}$ and $\frac{3}{4}$ NPT.



Fusible Links

• Model A - Fusible Link

Same as used on Model D Automatic Sprinklers; available with or without bronze chain hooks attached to each end. Temperature ratings of 160°, 212°, 280° and 350° Fahrenheit. Load capacity 15-40 lbs.. Link eye holes are $\frac{1}{4}$ diameter, spaced $\frac{1}{16}$ on center.



Underwriters Laboratories Listed, Guide No. JGIX.

The equipment presented in this bulletin is to be installed in accordance with the latest pertinent Standards of the National Fire Protection Association, Factory Mutual Research Corporation, or other similar organizations and also with the provisions of governmental codes or ordinances whenever applicable.

Products manufactured and distributed by Reliable have been protecting life and property for over 80 years, and are installed and serviced by the most highly qualified and reputable sprinkler contractors located throughout the United States, Canada and foreign countries.

Manufactured by

Reliable[®]

The Reliable Automatic Sprinkler Co., Inc.

(800) 431-1588
(800) 848-6051
(914) 668-3470
www.reliablesprinkler.com

Sales Offices
Sales Fax
Corporate Offices
Internet Address



Revision lines indicate updated or new data.
PG. Printed in U.S.A. 02/00 P/N 9999970035